

# DRIVEWAY APPLICATION

**SUWANNEE COUNTY PUBLIC WORKS DEPARTMENT  
13150 – 80<sup>TH</sup> TERRACE, LIVE OAK, FL 32064  
PHONE (386) 362-3992**

**FEE: \$50.00**

If your driveway access is off a State Roadway, please advise our office personnel. You will be required to contact Florida Department of Transportation for your driveway approval. (State Roads are as follows: 27, 51, 90, 129, 247, 49 SOUTH OF 27). **POWER WILL NOT BE RELEASE BY THE BUILDING DEPARTMENT UNTIL YOUR DRIVEWAY HAS BEEN APPROVED BY FDOT.**

## **DRIVEWAY REQUIREMENTS**

**POWER WILL NOT BE RELEASE BY THE BUILDING DEPARTMENT UNTIL YOUR DRIVEWAY HAS BEEN APPROVED BY THE COUNTY PUBLIC WORKS DEPARTMENT.**

When applying for a building permit, a form for the County Public Works Department must be completed for the Public Works Department to inspect your driveway to see what improvements must be made, if any. Please put stakes at the location of the proposed driveway entrance.

You must provide a printout showing the legal description of property and ownership from the property appraiser's office/website ([suwanneepa.com](http://suwanneepa.com)). If it shows in the name of the previous owner then you **MUST** (1) provide a copy of the recorded deed proving your ownership of the property, or (2) have a consent form signed by previous owner.

The Public Works Department will contact you as to the changes that must be made, if any. Please be sure to provide a current phone/fax number & email for them to contact you, otherwise there may be a delay.

It is your responsibility to make the improvements required by the Public Works Department and contact them directly (386-362-3992) to make a final inspection once improvements have been made.

After the Public Works Department has approved the entrance of your driveway, they will notify the Building Department.

SUWANNEE COUNTY PUBLIC WORKS DEPARTMENT  
13150 - 80TH TERRACE, LIVE OAK, FL 32064  
386/362-3992

Fax # \_\_\_\_\_

Permit # \_\_\_\_\_

**DRIVEWAY PERMIT APPLICATION**  
FEE: \$50.00

IF YOUR DRIVE ACCESS COMES OFF ONE OF THE FOLLOWING STATE ROADS PLEASE ADVISE OFFICE PERSONNEL, IT WILL BE NECESSARY FOR YOU TO FILE AN APPLICATION WITH FLORIDA DEPARTMENT OF TRANSPORTATION – 27, 51, 90, 129, 247, 49 SOUTH OF 27

APPLICANT: \_\_\_\_\_ PHONE #: \_\_\_\_\_

CURRENT ADDRESS: \_\_\_\_\_

CONTACT EMAIL: \_\_\_\_\_ FAX #: \_\_\_\_\_

PROPERTY OWNER: NAME: \_\_\_\_\_

ADDRESS: \_\_\_\_\_

LEGAL DESCRIPTION:

Sec. \_\_\_\_\_ Twp. \_\_\_\_\_ S Range \_\_\_\_\_ E Tax Parcel No.: \_\_\_\_\_

Lot \_\_\_\_\_ Subdivision \_\_\_\_\_

Size \_\_\_\_\_ Acres Other Dwellings \_\_\_\_\_

**EXACT DRIVING DIRECTIONS FROM MAJOR ROAD LEAVING LIVE OAK TO SITE USING ROAD NUMBERS:**

Job Description \_\_\_\_\_ Use \_\_\_\_\_

Lot Frontage: \_\_\_\_\_ Ft. Number of Driveways: \_\_\_\_\_

**Application is hereby made to inspect a driveway(s) to access a "County Maintained Road" only.**

\_\_\_\_\_ Date

\_\_\_\_\_ Signature of Applicant

**To be completed by County Public Works Department**

Culvert Required: \_\_\_\_\_ Size: \_\_\_\_\_ "Corrugated Metal Culvert with Concrete Mitered Ends"

Apron Required: \_\_\_\_\_ Width: \_\_\_\_\_ "Concrete"

Limerock Required: \_\_\_\_\_ Level & Cap with **6 inches** of limerock, from edge of road to property line

Ditch Fill Required: \_\_\_\_\_ Width: \_\_\_\_\_ Depth: \_\_\_\_\_ Length: \_\_\_\_\_

Disapproved for the following reasons: \_\_\_\_\_

**APPLICANT MUST CALL PUBLIC WORKS DEPARTMENT at (386) 362-3992 FOR "REINSPECTION" AFTER COMPLETION OF THE ABOVE-MENTIONED REQUIRED MODIFICATIONS. DRIVEWAY MUST BE INSTALLED AND INSPECTED PRIOR TO OCCUPANCY OF STRUCTURE OR NOTIFICATION TO THE POWER COMPANY FOR ELECTRICAL SERVICE.**

Approved "As Is": \_\_\_\_\_


Final Approval (improvements completed): \_\_\_\_\_

\_\_\_\_\_ Date

\_\_\_\_\_ Supervisor of Driveway Inspection

Suwannee County Public Works Department


# TYPICAL REQUIREMENTS FOR DRIVEWAYS NOT REQUIRING CULVERTS

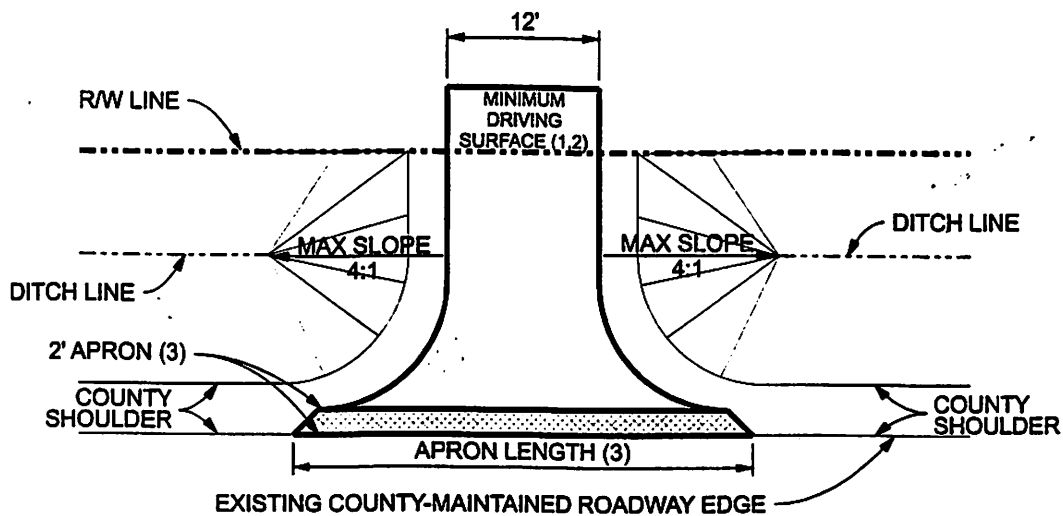

**PLAN VIEW**

## NOTES:

1. DRIVEWAY SURFACE TO BE A MINIMUM WIDTH OF 12'
2. MINIMUM REQUIREMENTS FOR DRIVING SURFACE SHALL BE STABILIZED WITH 6" OF CRUSHED LIMEROCK (COMPACTED) OR OTHER APPROVED MATERIAL.
3. CONCRETE APRON REQUIRED ADJACENT TO PAVED ROADWAYS. APRON SHALL BE 2' WIDE AND 6" THICK. LENGTH TO BE DETERMINED BY PUBLIC WORKS DEPARTMENT
4. FILL AREA SIDE SLOPES SHALL NOT BE STEEPER THAN 4:1

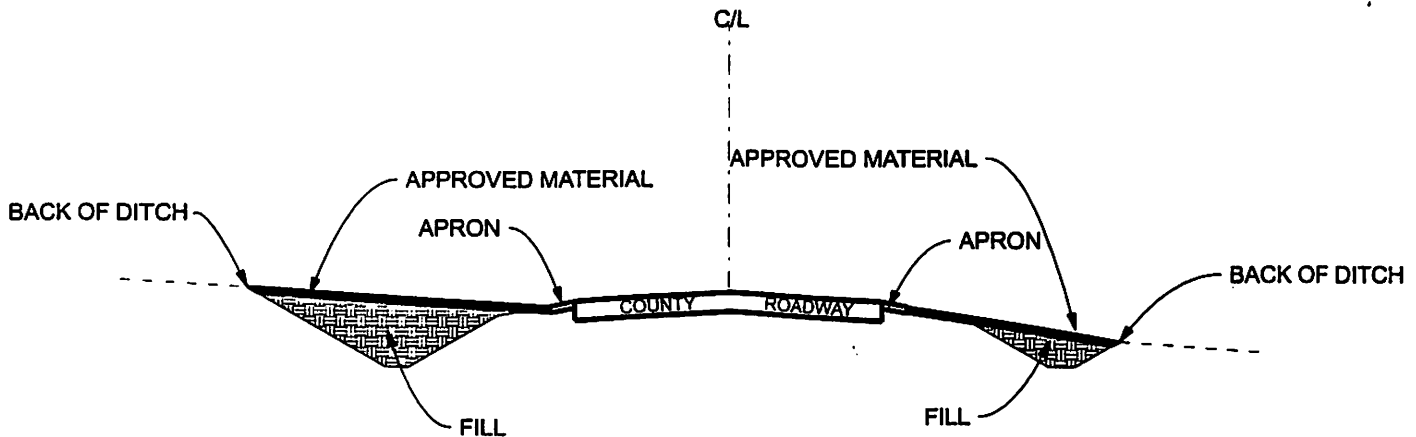


**SECTION VIEW**

## NOTES:


1. TOP 6" OF FILL TO BE CRUSHED, COMPACTED LIMEROCK OR OTHER APPROVED MATERIAL
2. CONCRETE APRONS REQUIRED ADJACENT TO PAVED ROADWAYS, AND EACH IS TO BE 2' WIDE, 6" THICK AND LENGTH TO BE DETERMINED BY PUBLIC WORKS DEPARTMENT
3. DITCH FILL WIDTH WILL BE DETERMINED BY PUBLIC WORKS. FILL AREA SIDE SLOPES SHALL NOT BE STEEPER THAN 4:1.

# TYPICAL REQUIREMENTS FOR DRIVEWAYS REQUIRING CULVERTS

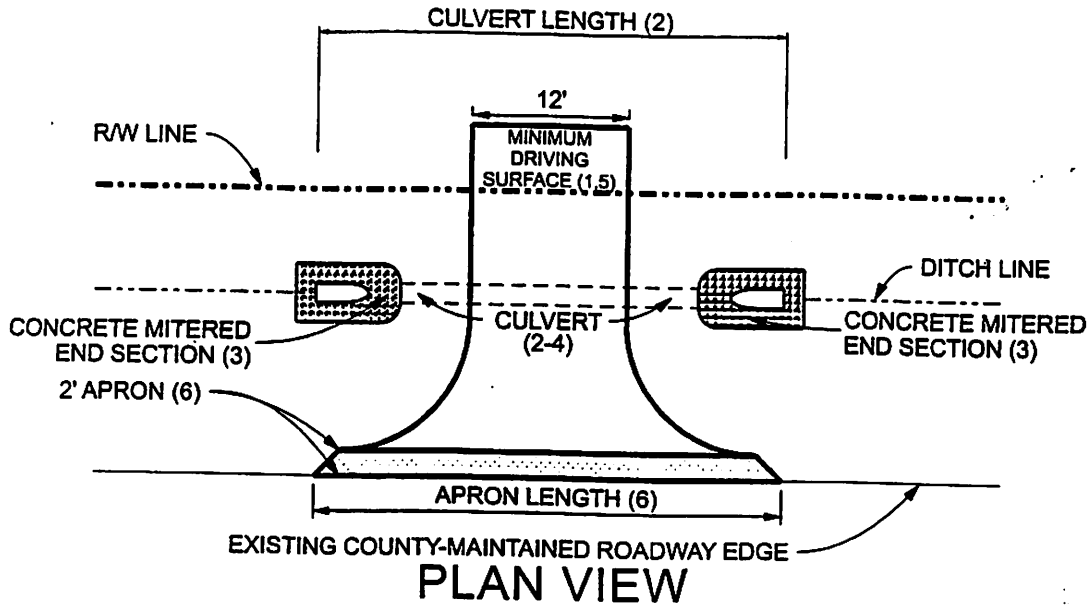

## NOTES:

1. DRIVEWAY SURFACE TO BE A MINIMUM WIDTH OF 12'
2. CULVERT LENGTH AND DIAMETER TO BE DETERMINED BY PUBLIC WORKS DEPARTMENT
3. CONCRETE ON MITERED ENDS (M.E.S.) SHALL BE CONSTRUCTED TO A MINIMUM OF 6" THICK AND MUST BE 2' IN WIDTH AROUND THE PERIMETER OF THE CULVERT OPENING - SEE ATTACHED M.E.S. DETAIL
4. MINIMUM COVER ON TOP OF CULVERT SHALL BE 6"
5. MINIMUM REQUIREMENTS FOR DRIVING SURFACE SHALL BE STABILIZED WITH 6" OF CRUSHED LIMEROCK (COMPACTED) OR OTHER APPROVED MATERIAL
6. CONCRETE APRON REQUIRED ADJACENT TO PAVED ROADWAYS. APRON SHALL BE 2' WIDE AND 6" THICK. LENGTH TO BE DETERMINED BY PUBLIC WORKS DEPARTMENT
7. FILL AREA SIDE SLOPES SHALL NOT BE STEEPER THAN 4:1
8. culvert must be corrugated metal.

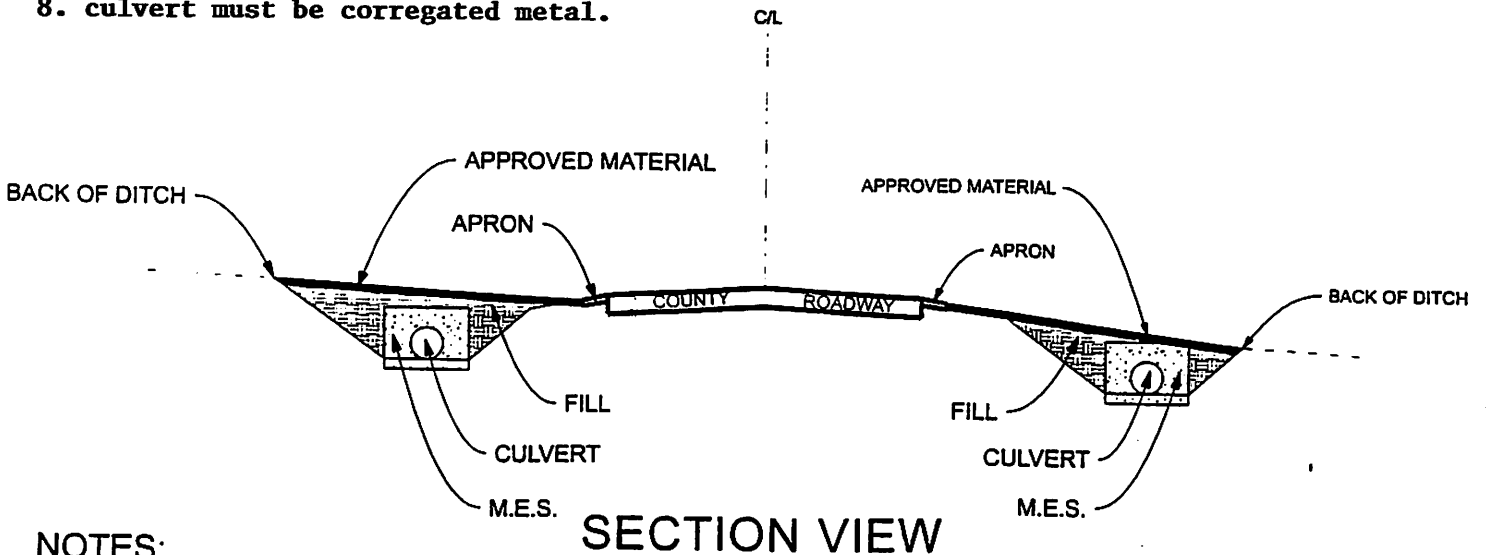

## NOTES:

1. TOP 6" OF FILL TO BE CRUSHED, COMPACTED LIMEROCK OR OTHER APPROVED MATERIAL
2. CONCRETE APRONS REQUIRED ADJACENT TO PAVED ROADWAYS, AND EACH IS TO BE 2' WIDE, 6" THICK AND LENGTH TO BE DETERMINED BY PUBLIC WORKS DEPARTMENT
3. DITCH FILL WIDTH WILL BE DETERMINED BY PUBLIC WORKS. FILL AREA SIDE SLOPES SHALL NOT BE STEEPER THAN 4:1.
4. MINIMUM COVER ON TOP OF CULVERT SHALL BE 6"

# TYPICAL REQUIREMENTS FOR MITERED END SECTIONS (MES)

